


## FWA-1550H-256xN Series, 256 ports CATV EDFA

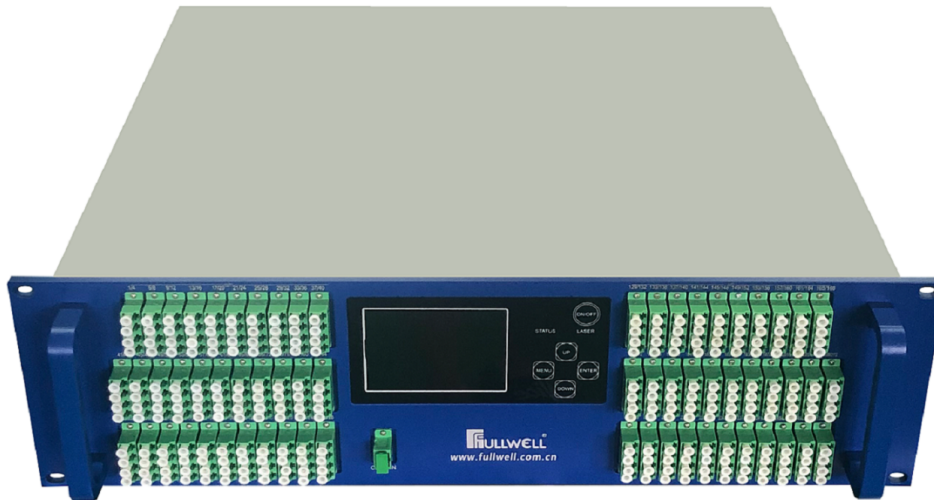

### 1. Product Description

FWA-1550H series erbium and ytterbium co-doped high-power fiber amplifier is the latest optical transmission system for CATV FTTH. The optical input number: 1 port of CATV or 2 redundant CATV inputs, 256 ports outputs, of which the total output power range of 1550nm is 35 ~ 45dBm. Multiple output power can be matched according to user demand.

This series product adopts Lumentum, II-VI etc multimode high power pump laser as pump source and American OFS closed beam splitter as double-cladding synthesizer. Built-in optical power output stabilization circuit and laser thermoelectric cooler temperature stabilization control circuit ensure the best performance of the EDFA and the long-term stable operation of the laser. The microprocessor software monitors the working status of the laser, and the working parameters are displayed on the digital panel (LCD). Once the laser's working parameters deviate from the allowable range set by the software, the micro-processing will automatically turn off the laser power, and the red light flashes to alert.

### 2. Product feature

- ◆ **Top quality:** Adopt multi-mode high-power pump laser and the power is optimized through software, which makes the system achieving excellent CNR.
- ◆ **Reliability:** Adopt 19" 3U standard chassis, built-in high performance modular switching power supply, can work in AC90 ~ 265V city network voltage. DC 48V hot-swappable power supply option is available as well. Dual hot and reserved power supply with Chassis automatic heat dissipation control.
- ◆ **Intuitive:** The built-in microprocessor monitors the working status of the pump laser, and the working parameters are displayed on LCD.
- ◆ **Network management Interface:** Web transponder is line with the national standard and compatible with the SCTE HMS standard, achieving WEB monitoring function. The red warning symbol is displayed on the web page, which is convenient for troubleshooting.
- ◆ **Adjustable output optical power:** Advanced design enables a large adjustable range of output power, and power can be lowered by 0 ~ -3dBm.
- ◆ **Built-in optical switch option:** There are automatic (prefer) or manual (force) switch mode when CATV signal has main path A and redundant path B optical switch input (OPT SWTCH). Automatic mode uses the main path A by default, it switches to redundant path B if A input power fails.

**3. Technical Parameters**

Items	Unit	Performance Index	
Optical Operating Wavelength	nm	1535~1565	
Input Optical Power Range	dBm	-10~+10	
Noise Ratio	dB	≤5.0 (0 dBm,@1550nm)	
Gain Flatness	dB	< ±0.3	
Optical Power Output Stability	dB	< ±0.5	
Polarization Sensitivity	dB	<0.2	
Polarization Mode Dispersion	Ps	<0.5	
Input End Pump Leakage Power	dB	≤-30	
Output End Pump Leakage Power	dB	≤-30	
Optical Input, Output Return Loss	dB	>45 (APC Stepped Face)	
Pump Operating Number	PCs	3~5	
Rated Output Power	dBm	35~45	
Linker (IN)	-	SC/APC	
Linker (OUT)	-	LC/APC	
Power Supply/Consumption	V/W	AC90~265 or DC-48/20	
Operating/Storage Temperature	°C	-20~65/-30~70	
Operating/Storage Humidity	%	5~90	
Case Size	mm	530×486×133 (3U)	
Network Management Connector	/	RJ45(following national network management standard, supports WEB)	
Optical Switch	Insertion Loss	dB	<1
	Harass	dB	<-60 (isolation between A and B)
	Switch Time	ms	<10
	Switched Power Threshold Range	dBm	-5~10

**4. Product model series**

Model Number	Total Output Power dBm(mW)	Output No.	Each Output Power (dBm)
FWA-1550H-64x14	35dBm(3000mW)	64	14
FWA-1550H-128x10		128	10
FWA-1550H-64x15	36dBm(4000mW)	64	15
FWA-1550H-128x11		128	11
FWA-1550H-64x16	37dBm(5000mW)	64	16
FWA-1550H-128x12		128	12
FWA-1550H-64x17	38dBm(6000mW)	64	17
FWA-1550H-128x13		128	13
FWA-1550H-128x14	39dBm(8000mW)	128	14
FWA-1550H-256x10		256	10
FWA-1550H-128x15	40dBm(10000mW)	128	15
FWA-1550H-256x11		256	11
FWA-1550H-128x16	41dBm(13000mW)	128	16
FWA-1550H-256x12		256	12
FWA-1550H-128x17	42dBm(16000mW)	128	17
FWA-1550H-256x13		256	13
FWA-1550H-128x18	43dBm(20000mW)	128	18
FWA-1550H-256x14		256	14
FWA-1550H-128x19	44dBm(25000mW)	128	19
FWA-1550H-256x15		256	15
FWA-1550H-128x20	45dBm(32000mW)	128	20
FWA-1550H-256x16		256	16

